


Product Information

- Construction** - Solid Vinyl Tile (Luxury Vinyl Tile / LVT)
- International Specifications** - ASTM F1700, Class III, Type B embossed surface
- Overall Thickness** - 2mm
- Wear Layer Thickness** - 12 mil
- Factory Finish** - Optique™ Coating
- Installation** - Parterre Universal
- Gloss** - Low
- Face Treatment** - Embossed
- Edge/End Treatment** - Square Edges/Square Ends
- Manufacturing Location** - USA*

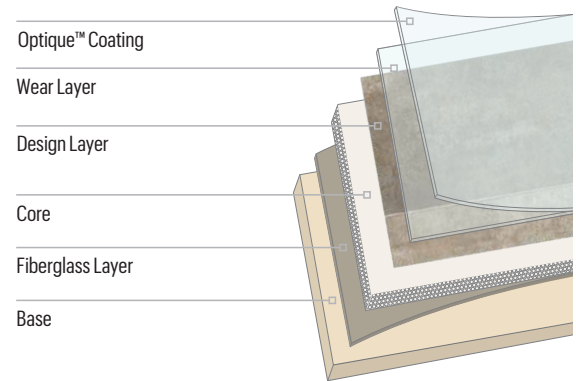

Packaging

Sizes	Pieces per Carton/Coverage	Shipping Weight per Carton
6.5 in. x 48 in. x 2mm	18/33.88 sq. ft. (3.2 m ²)	18.7 lbs. (7.5 kg)

Testing

ASTM F1700			
Performance	Test Method	Requirement	Performance vs. Requirement
Thickness	ASTM F386	Nominal ±0.005 in.	Meets
Size	ASTM F2421/F2055	± 0.016 in. per linear foot	Meets
Squareness	ASTM F2421/F2055	0.010 in. maximum	Meets
Dimensional Stability	Internal	≤ 0.018 in. per linear ft. MD ≤ 0.012 in. per lin. ft. AMD	Meets
Chemical Resistance	ASTM F925	No more than slight change in surface dulling, attack or staining	Meets
Resistance to Heat	ASTM F1514	ΔE < 8	Meets
Resistance to Light	ASTM F1515	ΔE < 8	Meets
Static Load Resistance @ 250	ASTM F970	< 0.005 in.	Meets
Additional Testing			
Fire Test Data – Flame Spread	ASTM E648	0.45 W/cm ² or more Class 1	Meets
Fire Test Data – Smoke Evolution	ASTM E 84	450 or less	Meets
Fire Test Data – Canada	CAN/ULC S-102.2	Use dependent	Flame Spread - 65; Smoke Developed - 75
ADA Standards for Accessible Design	Chapter 3, Section 302.1	Floor surfaces shall be stable, firm and slip resistant	Meets
Static Coefficient of Friction**	ASTM D2047/UL 410	≥ 0.5	Meets

Sustainability

WELL v1 Feature

	WELL v1 Feature	Unfazed	Contribution
Air	Feature 04 - VOC Reduction	✓	Tested and third party certified by FloorScore® as complying with CDPH v1.2
	Feature 11 - Fundamental Material Safety	✓	Product is free of asbestos and added lead (Part 1)
	Feature 25 - Toxic Material Reduction	✓	Free of flame retardants (Part 2) and phthalates (Part 3)
Mind	Feature 88 (Part 2) Biophilia I - Qualitative	✓	Products available that incorporate nature patterns
	Feature 99 - Beauty and Design II	✓	Patterns and colors to aid in wayfinding and spatial familiarity (Part 3)

WELL v2 Feature

	WELL v2 Feature	Unfazed	Contribution
Materials	Feature X01.1 Material Restrictions	✓	Product is free of asbestos
	Feature X05.1 Enhanced Material Restrictions	✓	Free of flame retardants (Part 2) and phthalates (Part 3)
	Feature X06.1 VOC Restrictions	✓	Adhesives associated with product are tested and third party certified by FloorScore as complying with CDPH v1.2
	Feature X06.2 VOC Restrictions	✓	Flooring is tested and third party certified by FloorScore as complying with CDPH v1.2
Mind	Feature M02.1 Nature and Place	✓	Products available that incorporate nature patterns
Community	Feature C13 (Part 2) Accessibility and Universal Design	✓	Patterns and colors to aid in wayfinding and spatial familiarity

LEED® v4.1

	LEED® v4.1	Unfazed
	Location of Manufacturer	USA
	Low Emitting Flooring	Tested and third party certified by FloorScore as complying with CDPH v1.2
	Low Emitting Adhesives	Tested and compliant to CDPH v1.2; Methylene Chloride and Perchloroethylene not intentionally added; FloorScore Certified
	SCAQMD #1168 Compliant.	Parterre Universal - <14 g/L
	Adhesives meet <50 g/L requirement	

Limited Warranty

5-Year Limited Light Commercial Warranty and 30-Year Residential Warranty when installed in strict accordance with the detailed instructions.

ParterreFlooring.com

for complete Product, Technical, Adhesives, Installation & Maintenance recommendations.

PT-1035-124

©2024 FloorScore® is a registered trademark of the Resilient Floor Covering Institute | LEED® is a registered trademark of the United States Green Building Council. All other trademarks are owned by AHF, LLC or its subsidiaries or affiliates.

*Unfazed floors are manufactured in the USA with global and domestic content. **Using the James Machine as described in D2047 and as directed in UL 410 for floor covering materials (FCM) using a leather foot under dry conditions. The application of site-applied floor sealers, polishes and other types of finishes routinely used to maintain resilient flooring materials will change the walking surface and consequently the SCOF value.